



C-Series S

Flexible Air Curtain for visible horizontal installation


The C-Series sets new standards in terms of effectiveness, energy efficiency and functionality. Future-oriented technology, high quality and workmanship, maximum flexibility and trend-setting design make the C-Series a reliable all-rounder for every need and every situation.

Application

The horizontal Air Curtain of the C-Series housing type S is the classic solution for effective separation of indoor and outdoor air. With its frontal air intake, it can be installed either directly above the door or up to the maximum recommended installation height.

Teddington works

Crucial for the successful shielding of doors and gates is the interplay between air discharge speed and air volume. The CONVERGO® pressure chamber nozzle system developed and patented by Teddington has been optimized for this purpose and ensures maximum shielding across the entire door.

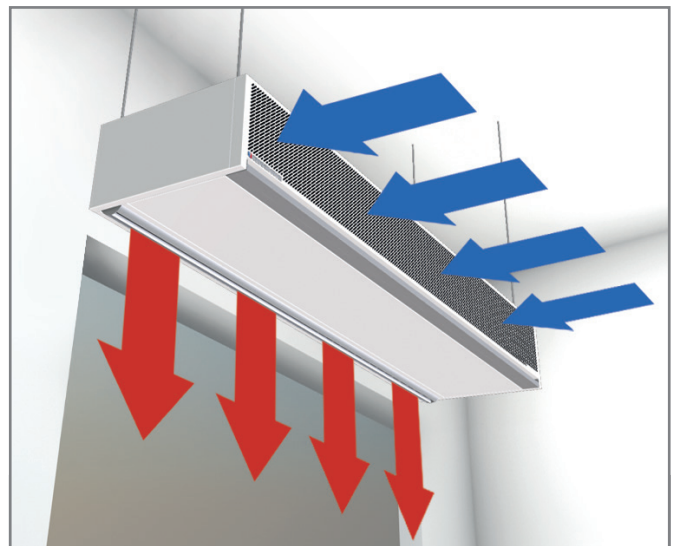

Housing type S

Horizontal visible installation,
air intake at the front.



VARIOUS OPTIONS

Heating modes



The Teddington C-Series is available as an ambient unit without heating and can be heated in the versions LTHW (water), electric or R410a / R32 (VRF).

Air Discharge range up to 3.3 m



Our powerful and fast-starting C-Series fans, in conjunction with our patented CONVERGO® pressure chamber nozzle system allow a maximum installation height of up to 3.3 metres.

Installation types



Depending on whether there is positive or negative pressure inside the building, there are two different types of installation of the Air Curtain system which are used: IDW (internally rotating air roll) or ADW (externally rotating air roll) installation.

2 power levels



The Teddington C-Series S is available in two power levels. This means that your Air Curtain is configured precisely for the respective requirement in order to guarantee optimum shielding and the lowest possible energy consumption.

AC or EC fans



A distinction is made between two fan technologies: AC and EC. Teddington is one of the few Air Curtain manufacturers to offer both technologies. This allows us to respond flexibly to project requirements and offer the optimal unit.

AC: The fast-starting AC fans are particularly suitable for doors and gates that open and close quickly or are only open for a short time.

EC: The energy-saving and infinitely variable EC fans are particularly suitable for doors and gates that are open for long periods (e.g. open glass front of a shop).

TCX - Our most innovative control system

With the TCX controller generation, you can now control your Teddington Air Curtain system even more easily and clearly. Just a few steps are all it takes for reliable configuration according to your requirements. Whether for a single Air Curtain system or a complex system grouping. TCX – the perfect controller for your Air Curtain system.





TECHNICAL DATA



Power level
Length of the unit (cm)

C-Series 1

C-Series 2




Performance data

Max. recommended installation height	[m]	2.80					3.30				
Max. nominal flow rate	[m³/h]	1960	2940	3920	4900	5880	1960	3920	4900	5880	6860
Max. effective flow rate*	[m³/h]	1500	2350	3150	3900	4700	1600	2950	3700	4500	5250
Average air discharge speed*	[m/s]	14					15.5				

Sound pressure level at a distance of 3 metres to the sound source (anechoic chamber)

Max. operating level	[dB(A)]	56.5	57.5	59.5	61.5	64.5	58.0	58.5	61.5	63.5	64.5
Standard operating level	[dB(A)]	48.0	49.0	50.5	53.0	54.0	50.0	51.0	53.5	56.0	57.0
Minimum operating level	[dB(A)]	38.0	39.0	40.5	43.0	44.0	39.0	40.0	42.5	45.0	46.0

*Data are based on measurements in accordance with ISO 27327 conducted by the Institute of Air Handling and Refrigeration (ILK) in Dresden

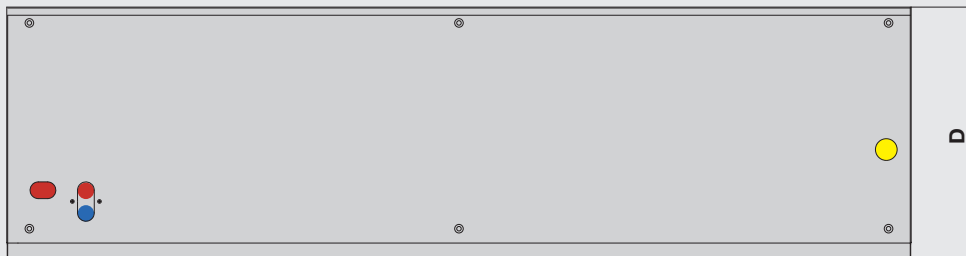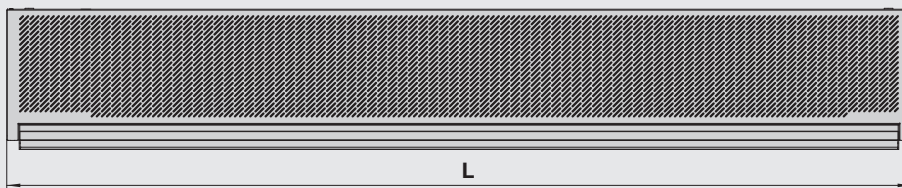

- Power connection
- Flow with valve
- Flow
- Return flow

As standard, connections are as drawn; optionally they can also be mirrored. The drawing shows a LTHW unit (water) with filter and 6 fixing points.



Power level
Length of the unit (cm)

C-Series 1

C-Series 2

Measurements

Length	L	[mm]	1000	1500	2000	2500	3000	1000	1500	2000	2500	3000
Height	H	[mm]	290	290	290	290	290	290	290	290	290	290
Depth	D	[mm]	560	560	560	560	560	560	560	560	560	560
Weight without heater battery		[kg]	40	58	73	90	106	40	61	77	94	110
Weight with heater battery		[kg]	46	65	84	103	122	46	69	88	107	126
Fixing Points		[pcs.]	4	4	4	6	6	4	4	4	6	6



TECHNICAL DATA



Power level
Length of the unit (cm)

C-Series 1

C-Series 2

100 150 200 250 300 100 150 200 250 300

Technical data of fans (230 V)

AC technology

Output	[kW]	0.37	0.56	0.74	0.93	1.11	0.37	0.74	0.93	1.11	1.30
Power consumption	[A]	1.70	2.55	3.40	4.25	5.10	1.70	3.40	4.25	5.10	5.95

EC technology

Output	[kW]	0.34	0.51	0.68	0.85	1.01	0.34	0.68	0.85	1.01	1.18
Power consumption	[A]	2.70	4.05	5.40	6.75	8.10	2.70	5.40	6.75	8.10	9.45



Power level
Length of the unit (cm)

C-Series 1

C-Series 2

100 150 200 250 300 100 150 200 250 300

Technical data of LTHW heater battery

Pipe connections

Flow / Return flow	[inch]	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
--------------------	--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

LTHW 70/50 at an air intake temperature of 20°C and air discharge temperature of 32°C

Heat output	[kW]	6.42	9.91	13.11	16.07	20.99	7.00	12.99	15.57	19.81	22.45
Flow rate	[m³/h]	0.30	0.40	0.60	0.70	0.90	0.30	0.60	0.70	0.90	1.00
Water resistance	[kPa]	0.70	0.74	1.07	1.53	2.59	0.81	1.19	1.44	1.92	2.91

LTHW 70/50 at an air intake temperature of 10°C and air discharge temperature of 32°C

Heat output	[kW]	11.34	17.71	24.27	29.45	34.49	12.22	22.51	27.63	33.91	40.02
Flow rate	[m³/h]	0.50	0.80	1.10	1.30	1.50	0.50	1.00	1.20	1.50	1.80
Water resistance	[kPa]	1.90	2.05	3.15	4.44	6.20	2.16	3.13	3.96	4.95	8.05

LTHW 50/35 at an air intake temperature of 20°C and max. air discharge temperature

Heat output	[kW]	4.82	13.71	12.38	14.24	20.52	5.05	9.76	13.76	17.74	22.1
Air discharge temperature	[°C]	29.36	27.19	31.4	30.62	32.7	29.17	29.63	30.82	31.47	32.25
Flow rate	[m³/h]	0.30	0.80	0.70	0.80	1.20	0.30	0.60	0.80	1.00	1.30
Water resistance	[kPa]	0.80	2.31	1.71	2.18	4.39	0.80	1.27	2.05	2.80	5.01

Ask our experts for data on your individual media temperatures.



Power level
Length of the unit (cm)

C-Series 1

C-Series 2

100 150 200 250 300 100 150 200 250 300

Technical data electrical heater battery

Electrical heater battery (three-stage, 400V, 3 Ph, 50 Hz)

Level 1	[kW]	3.0	4.5	6.0	6.0	9.0	3.0	6.0	6.0	9.0	12.0
Level 2	[kW]	6.0	9.0	12.0	18.0	18.0	9.0	12.0	18.0	18.0	24.0
Level 3	[kW]	9.0	13.5	18.0	24.0	27.0	12.0	18.0	24.0	27.0	36.0
Max dt.	[K]	17	15	16	17	16	21	17	18	17	19



Power level
Length of the unit (cm)

C-Series 1

C-Series 2


100 150 200 250 300 100 150 200 250 300

Technical data of heater R410a for a condensation temperature of 50 °C


Max. heat output	[kW]	7.3	12.1	15.8	20.6	25.3	7.6	14.2	17.8	22.5	28.0
Max. air discharge at Ta 20°C	[°C]	34.2	34.7	34.5	35.0	35.4	33.9	33.7	33.7	34.5	35.0
Heat output 20/32°C	[kW]	6.5	10.3	13.8	17.2	20.6	6.9	13.1	16.3	19.6	22.8
Volume	[l]	0.9	1.6	2.3	3.0	3.6	0.9	1.6	2.3	3.0	3.6
Max. pressure drop	[kPa]	5.5	6.6	2.1	4.1	7.1	6.0	8.8	2.5	4.8	8.1




Example: Comparison of energy consumption



Door without
Air Curtain system



Door with
Teddington
Air Curtain system



Door with
conventional
Air Curtain system

Energy consumption winter*: ~ 41.100 kWh

Energy consumption summer**: ~ 18.300 kWh

~ 16.800 kWh

~ 4.800 kWh

~ 23.400 kWh

~ 6.900 kWh

Energy savings with Teddington Air Curtain system compared to a door without Air Curtain system

Savings	Door without Air Curtain system	Door with Teddington Air Curtain system
Energy consumption winter*: 59%	~ 41.100 kWh	~ 16.800 kWh
Energy consumption summer**: 74%	~ 18.300 kWh	~ 4.800 kWh

Energy savings with Teddington Air Curtain system compared to a door with conventional Air Curtain system

Savings	Door with conventional Air Curtain system	Door with Teddington Air Curtain system
Energy consumption winter*: 28%	~ 23.400 kWh	~ 16.800 kWh
Energy consumption summer**: 30%	~ 6.900 kWh	~ 4.800 kWh

* heated inside

** cooled down inside

Assumptions on which the calculation is based:

- Door dimensions 2.5 x 2.5 m, installation height 2.5 m, door opening time 3 h per day.
- The system is in operation for 4 months in summer at a temperature difference (inside/outside) of 10 K.
- The system is in operation for 6 months in winter at a temperature difference (inside/outside) of 15 K.
- The system is out of operation for 2 months as the temperature difference between inside and outside is equalised.
- During operation in winter, a heat exchanger is used in the Air Curtain unit to heat the discharged air.




Individual colours

Teddington Air Curtain systems are powder-coated to a high quality. Our units are manufactured in RAL 9016 Traffic White as standard. On request, you can choose from six timeless colours for a small surcharge. – Would you like a very special colour? Talk to us about your desired colour.




RAL 7011
Iron Grey




RAL 9005
Deep Black




RAL 9006
White Aluminium



RAL 9010
Pure White



Black grey metallic
Metallic fine structure / matt



DB 703
Dark Grey



Teddington Luftschleieranlagen GmbH
Industriepark Nord 42 • D-53567 Buchholz (Mendt)
Tel. +49 (2683) 9694-0 • info@teddington.de
www.teddington.de